


# RESI-60DO-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface.  
The IO module offers 60 digital outputs for DC signals  $\leq 30V=$ .

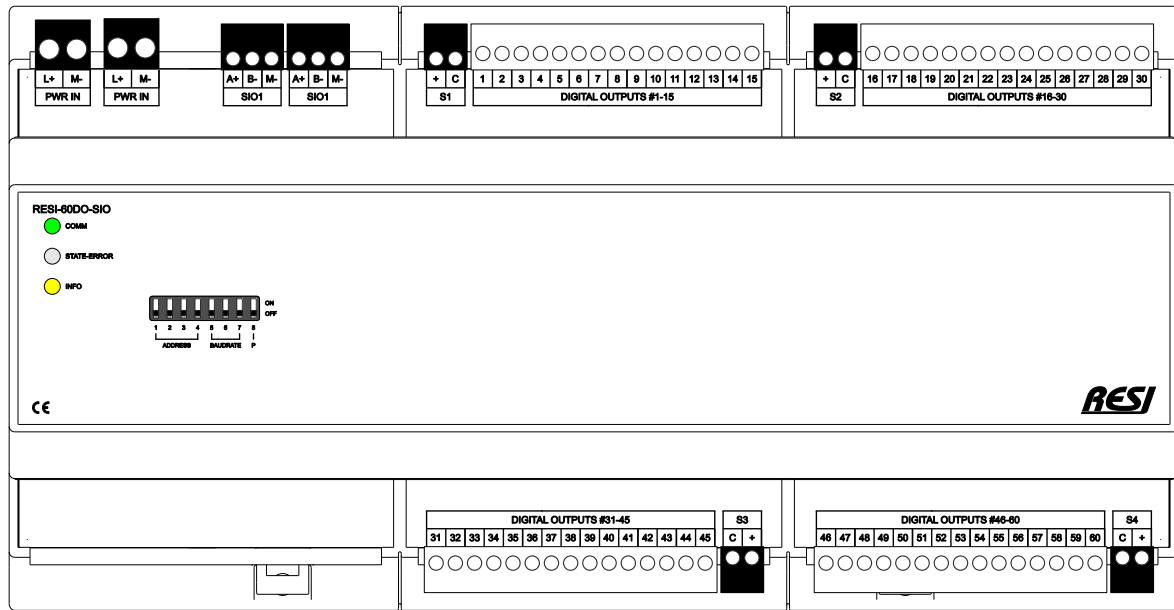

|   |                             |       |                      |                         |
|---|-----------------------------|-------|----------------------|-------------------------|
| DIN EN 50022<br>Snap-on<br>for DIN-Rail | ON-WALL<br>Mounting on-wall | RS485 | XT12<br>213x110x62mm | 12-48V=<br>Power supply |
|---|-----------------------------|-------|----------------------|-------------------------|

|                       |   |                             |
|-----------------------|---|-----------------------------|
| 60<br>Digital Outputs | DIGITAL OUTPUT<br>Output is shortcut & over heat protected.<br>Organized in 4 groups with 15 outputs each.<br><br>Each output group is externally supplied.<br>Max. 1.8A power supply for output group. | $\leq 30V=$<br>$\leq 700mA$ |
|-----------------------|---|-----------------------------|

**Functionality**  
IO module with 60 digital outputs for  $\leq 30Vdc$  signals.  
Each group of 15 outputs has its own power supply connector.  
Each output group detects power supply, overheat or short cut error.  
All outputs are galvanic-ally insulated from the rest of the module.