
## **RESI-90DO-SIO**

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface. The IO module offers 90 digital outputs for DC signals  $\leq$  30V=.



| DIN EN 50022<br>Snap-on<br>for DIN-Rail | ON-WALL<br>Mounting on-wall | RS485 | <b>XT12</b><br>213x110x62mm | 12-48V=<br>Power supply |  |
|---|-----------------------------|-------|-----------------------------|-------------------------|--|
|---|-----------------------------|-------|-----------------------------|-------------------------|--|

| 90<br>Digital Outputs                         | DIGITAL OUTPUT<br>Output is shortcut & over heat protected.<br>Organized in 6 groups with 15 outputs each.<br>Each output group is externally supplied.<br>Max. 1.8A power supply for output group. | ≤30V=<br>≤700mA |
|---|---|-----------------|
| Each group of 15 outp<br>Each output group de | ital outputs for ≤30Vdc signals.<br>uts has its own power supply connector.<br>tects power supply, overheat or short cut error.<br>c-ally insulated from the rest of the module.                    |                 |

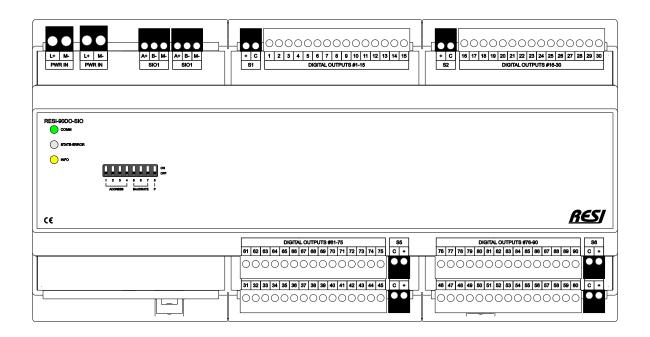