


RESI-DALI-SIO

Our powerful master gateway between DALI light bus and host. Host protocols: MODBUS/RTU or ASCII text. Host communication via RS232 or RS485 serial interface. Communicate with DALI 1.0 ballasts or with DALI 2.0 control gears. Support of DALI device type DT8 for RGB and RGBW LED stripes. Configuration & test of DALI light system with our free software MODBUSConfigurator.

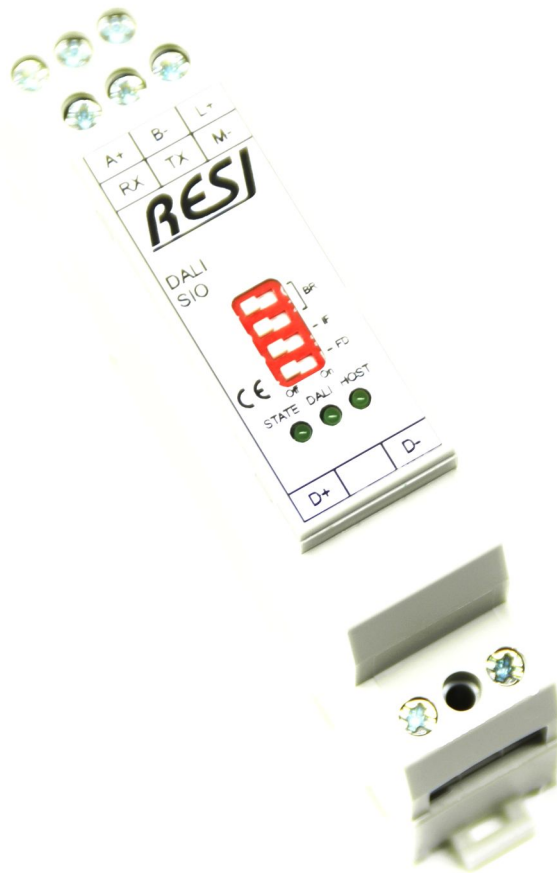

<p>HOST MODBUS/RTU MASTER ASCII TEXT</p> <p>RS232 RS485</p> <p>RESI</p> <p>DALI 1.0/2.0</p> <p>DALI LIGHT NETWORK</p>	<p>DALI 1.0/2.0 Up to 64 ballasts or control gears</p>	<p>DALI CABLE Up to 300m DALI cable length</p>	<p>DALI BUS search & initialize & test a DALI network</p>	<p>external DALI power supply necessary</p>
	<p>Functionality DALI 1.0/2.0 master gateway to control DALI 1.0 ballasts and to communicate with DALI 2.0 control gears. Supports all DALI 1.0/2.0 commands and DALI DT6 and DT8 commands. Special support of eDALI commands.</p>	<p>Serial Interface RS232 or RS485 300..256000 baud No, even, odd parity 8 data bits 1 or 2 stop bits</p>	<p>1xRS232 MODBUS/RTU slave ASCII text protocol</p>	<p>1xRS485 MODBUS/RTU slave ASCII text protocol</p>
	<p>MODBUSConfigurator free configuration software</p>	<p>DIN EN 50022 Snap-on for DIN-Rail</p>	<p>CEM17 17.5x90x56.4mm</p>	<p>12-48V= Power supply</p>