


# RESI-7RI5SSR-xA-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 7 independent digital inputs for AC or DC signals 12-250V $\sim$  = and 5 solid state relay outputs with Form A solid state relays.

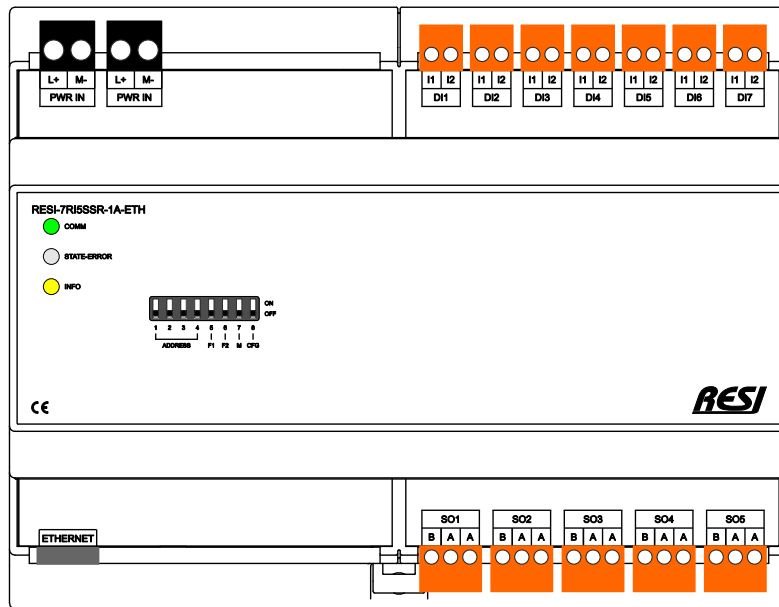

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT8 143x110x62mm	12-48V= Power supply	5xFormA	
---	-----------------------------	----------	---------------------	-------------------------	---------	--

7 Digital Inputs	LOGIC INPUT Each input has its own 2pin plug-in terminal	12...250V $\sim$ = $\leq$ 1.8mA
5 Solid State Outputs	SOLID STATE OUTPUT 5xForm A	$\leq$ 230V $\sim$ = $\leq$ 1A or $\leq$ 60V $\sim$ = $\leq$ 3A or $\leq$ 60V $\sim$ = $\leq$ 6A

#### Functionality

IO module with 7 digital inputs for 12-250Vac/dc signals and 5 solid state outputs for switching AC or DC signals. Every input with own common contact to use different AC or DC supplies for every input.

RESI-7RI5SSR-1A-xxx: Solid state relays with  $\leq$ 230V $\sim$ =,  $\leq$ 1A

RESI-7RI5SSR-3A-xxx: Solid state relays with  $\leq$ 60V $\sim$ =,  $\leq$ 3A

RESI-7RI5SSR-6A-xxx: Solid state relays with  $\leq$ 60V $\sim$ =,  $\leq$ 6A