


RESI-14RI10SSR-xA-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 14 independent digital inputs for AC or DC signals 12-250V \sim = and 10 solid state relay outputs with Form A solid state relays.

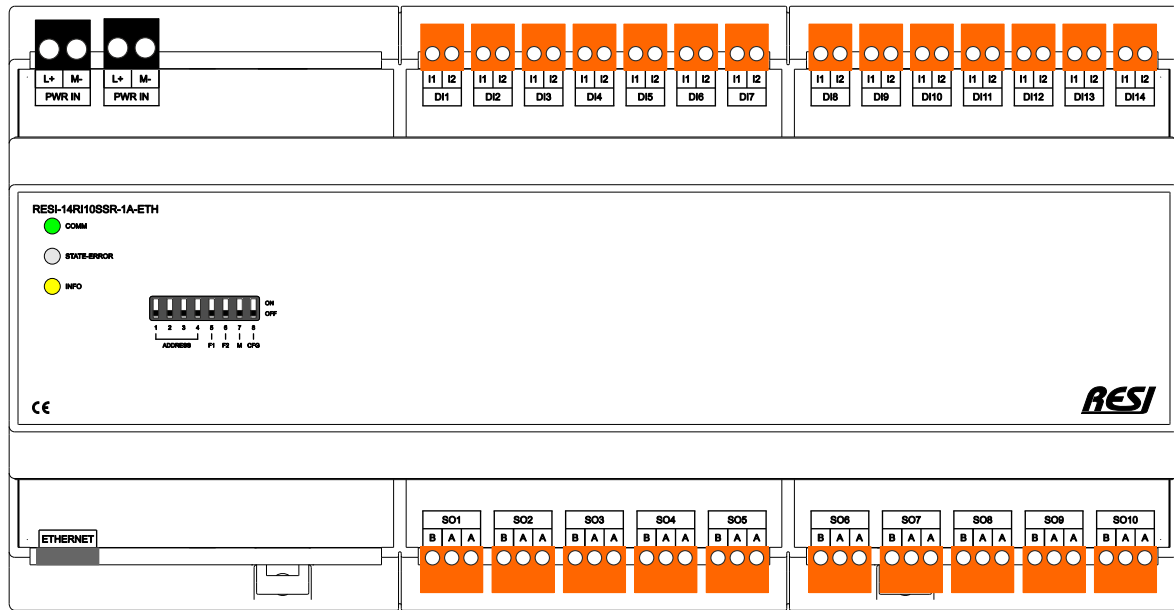

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT12 213x110x62mm	12-48V= Power supply	10xFormA	
---	-----------------------------	----------	----------------------	-------------------------	----------	--

14 Digital Inputs	LOGIC INPUT Each input has its own 2pin plug-in terminal	12...250V \sim = \leq 1.8mA
10 Solid State Outputs	SOLID STATE OUTPUT 10xForm A	\leq 230V \sim = \leq 1A or \leq 60V \sim = \leq 3A or \leq 60V \sim = \leq 6A

Functionality

IO module with 14 digital inputs for 12-250Vac/dc signals and 10 solid state outputs for switching AC or DC signals. Every input with own common contact to use different AC or DC supplies for every input.

RESI-14RI10SSR-1A-xxx: Solid state relays with \leq 230V \sim =, \leq 1A

RESI-14RI10SSR-3A-xxx: Solid state relays with \leq 60V \sim =, \leq 3A

RESI-14RI10SSR-6A-xxx: Solid state relays with \leq 60V \sim =, \leq 6A