
RESI-S8PO-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface. The IO module offers 8 bistable power relay outputs with manual override for AC and DC signals.

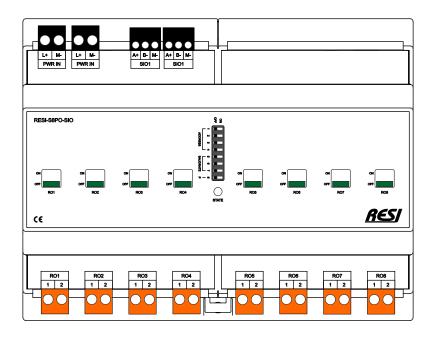

DIN EN 50022 Snap-on for DIN-Rail

ON-WALL Mounting on-wall

RS485

XT8 143x110x62mm

12-48V= Power supply

8xFormA Manual override

8 bistable Power Relay Outputs **BISTABLE RELAY OUTPUT**

Form A

≤30V= ≤250V~ ≤16A ≤200µF AgSnO₂

IO module with 8 bistable power relay outputs for switching AC or DC signals especially for capacitive loads.

