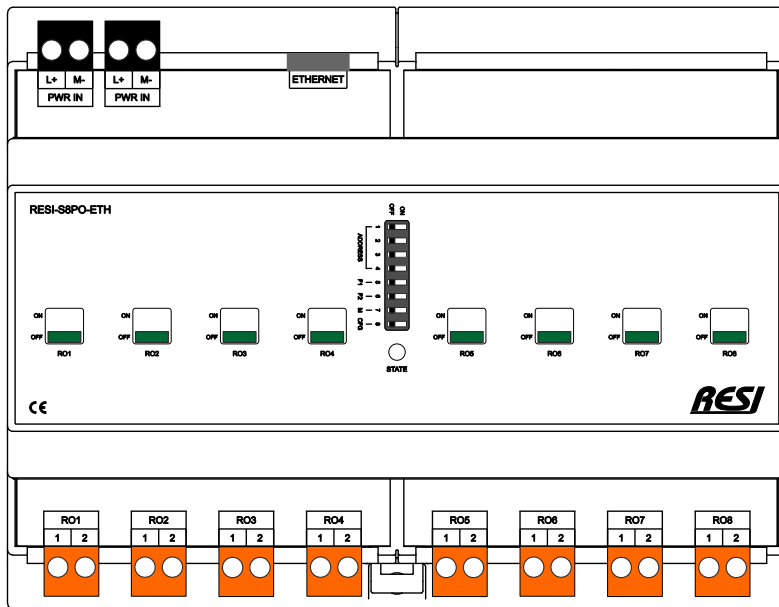# RESI-S8PO-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface.
The IO module offers 8 bistable power relay outputs with manual override for AC and DC signals.



| DIN EN 50022 Snap-on for DIN-Rail | ON-WALL Mounting on-wall | ETHERNET | XT8 143x110x62mm | 12-48V= Power supply | 8xFormA Manual override | |
|---|---|---|---|---|---|---|

| 8 bistable Power Relay Outputs | BISTABLE RELAY OUTPUT Form A | ≤30V= ≤250V~ ≤16A ≤200µF AgSnO₂ |
|---|---|---|

**Functionality**
IO module with 8 bistable power relay outputs for switching AC or DC signals especially for capacitive loads.

RESI