


RESI-S16DI8PO-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 16 digital inputs for DC signals 12-48V and 8 bistable power relay outputs with manual override for AC and DC signals.

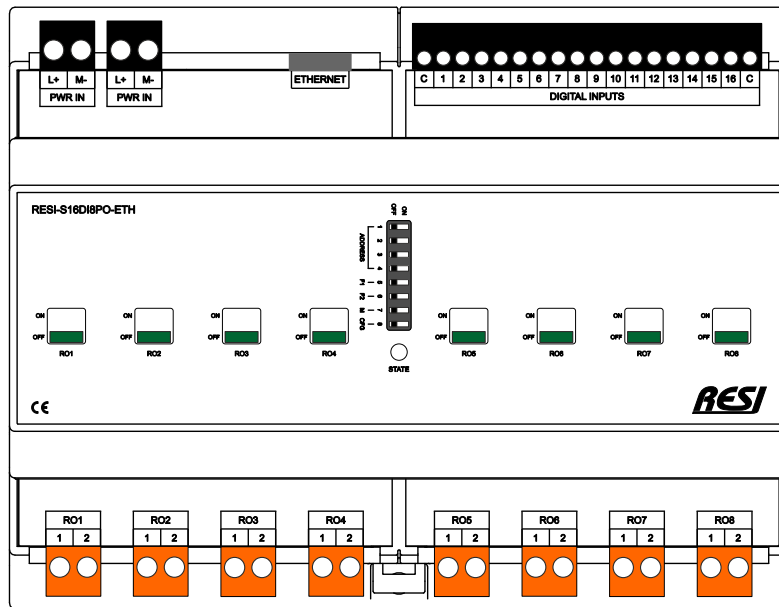

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT8 143x110x62mm	12-48V= Power supply	8xFormA Manual override	
---	-----------------------------	----------	---------------------	-------------------------	----------------------------	--

16 Digital Inputs	LOGIC INPUT	12...48V= ≤1.8mA
8 bistable Power Relay Outputs	BISTABLE RELAY OUTPUT Form A	≤30V= ≤250V~ ≤16A ≤200μF AgSnO ₂
Functionality IO module with 16 digital inputs for 12-48Vdc signals and 8 bistable power relay outputs for switching AC or DC signals especially for capacitive loads.		