


# RESI-4LED-ETH

Our powerful master gateway for LED stripes is designed to connect LED stripes directly to the gateway. The gateway is made for constant voltage LED stripes with common anode. The brightness control for every channel is done via PWM output. Host protocols: MODBUS/TCP or ASCII text. Host connection via Ethernet interface. Configuration & test of LED stripe system with our free software MODBUSConfigurator.

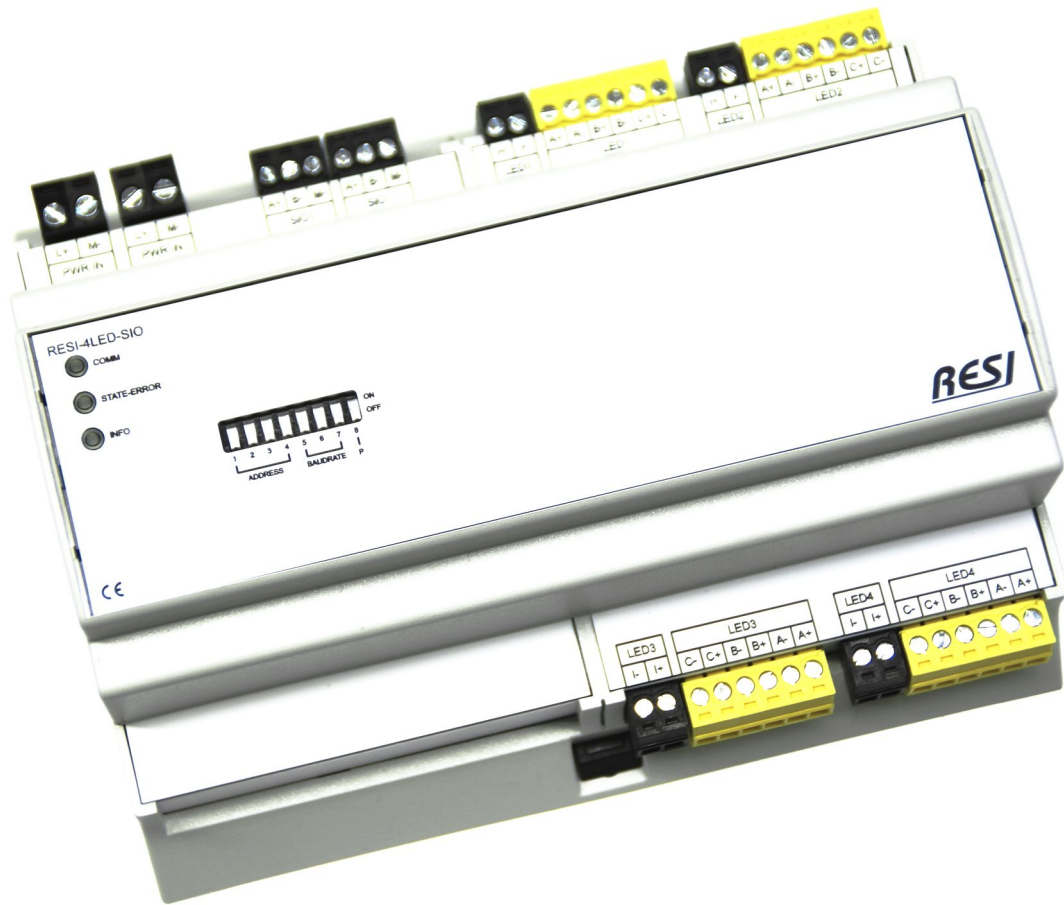

	<b>LED stripe gateway</b>	<b>LED stripe type</b> constant voltage common anode	<b>12xPWM outputs</b> ≤60V=, ≤5A/channel	<b>4xpower supply</b> for LEDs ≤60V=, ≤15A
	<b>Functionality</b> MODBUS master for LED stripes. Individual control of twelve PWM channels. LED stripe types: RGB, dual or mono colour  External power supply for 4 LED stripe groups: ≤60V=, ≤5A/channel, usually 12V= or 24V=	<b>Ethernet</b> Web Server for IPV4/DHCP setup MODBUS/TCP or MODBUS/RTU via Ethernet or ASCII text protocol	<b>1xETHERNET</b> 10/100MBit RJ45	<b>XT8</b> 143x110x62mm
<b>MODBUSConfigurator</b> free configuration software	<b>DIN EN 50022</b> Snap-on for DIN-Rail	<b>WALL MOUNTING</b> option	<b>12-48V=</b> Power supply	