


# RESI-16DI15DO-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface.  
The IO module offers 16 digital inputs for DC signals 12-48V= and 15 digital outputs for DC signals  $\leq 30V=$ .

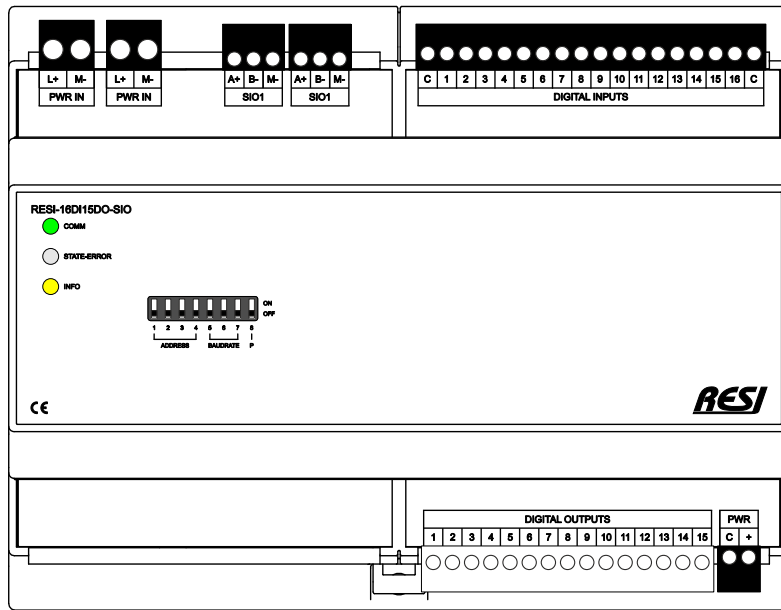

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	RS485	XT8 143x110x62mm	12-48V= Power supply
---	-----------------------------	-------	---------------------	-------------------------

16 Digital Inputs	LOGIC INPUT	12...48V= $\leq 1.8mA$
15 Digital Outputs	DIGITAL OUTPUT Output is shortcut & over heat protected. Organized in 1 group with 15 outputs each.  Each output group is externally supplied. Max. 1.8A power supply for output group.	$\leq 30V=$ $\leq 700mA$
<b>Functionality</b> IO module with 16 digital inputs for 12-48Vdc signals and 15 digital outputs for $\leq 30Vdc$ signals. Each group of 15 outputs has its own power supply connector. Each output group detects power supply, overhear or short cut error. All outputs are galvanic-ally insulated from the rest of the module.		