


# RESI-64DI60DO-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface.  
The IO module offers 64 digital inputs for DC signals 12-48V= and 60 digital outputs for DC signals  $\leq 30V=$ .

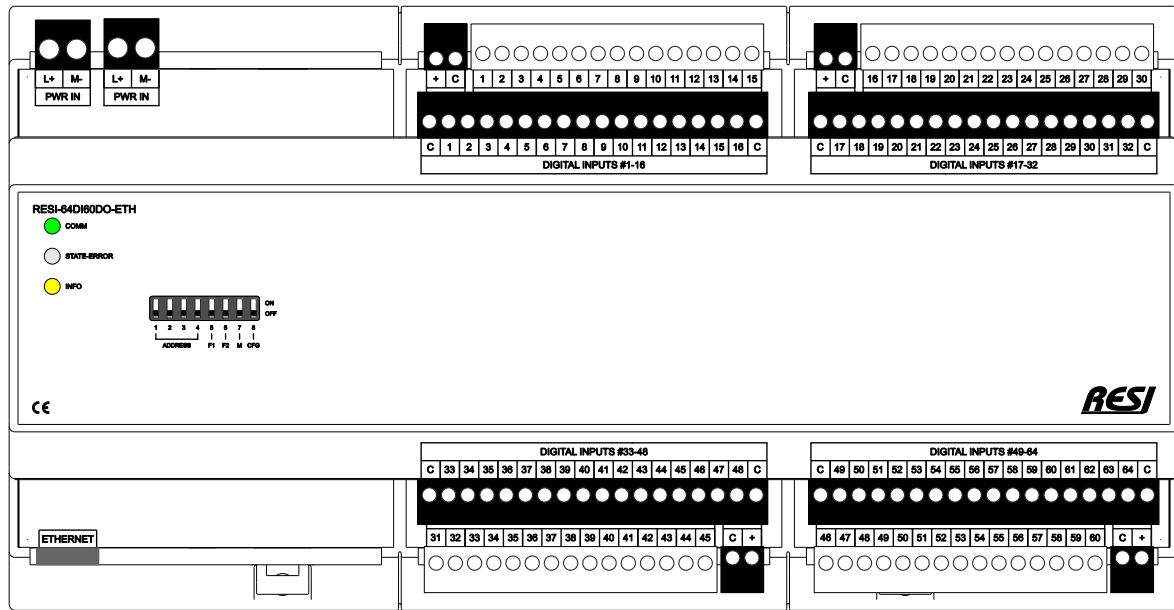

|   |                             |          |                      |                         |
|---|-----------------------------|----------|----------------------|-------------------------|
| DIN EN 50022<br>Snap-on<br>for DIN-Rail | ON-WALL<br>Mounting on-wall | ETHERNET | XT12<br>213x110x62mm | 12-48V=<br>Power supply |
|---|-----------------------------|----------|----------------------|-------------------------|

|  |   |                             |
|--|---|-----------------------------|
| 64<br>Digital Inputs   | LOGIC INPUT   | 12...48V=<br>$\leq 1.8mA$   |
| 60<br>Digital Outputs  | DIGITAL OUTPUT<br>Output is shortcut & over heat protected.<br>Organized in 4 groups with 15 outputs each.<br><br>Each output group is externally supplied.<br>Max. 1.8A power supply for output group. | $\leq 30V=$<br>$\leq 700mA$ |
| <b>Functionality</b><br>IO module with 64 digital inputs for 12-48Vdc signals and 60 digital outputs for $\leq 30Vdc$ signals.<br>Each group of 15 outputs has its own power supply connector.<br>Each output group detects power supply, overheat or short cut error.<br>All outputs are galvanic-ally insulated from the rest of the module. |   |                             |