
RESI-10RI8RO-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 10 digital inputs for AC or DC signals 12-250V~= and 8 Form A relay outputs for AC/DC signals with common power supply+root contacts.

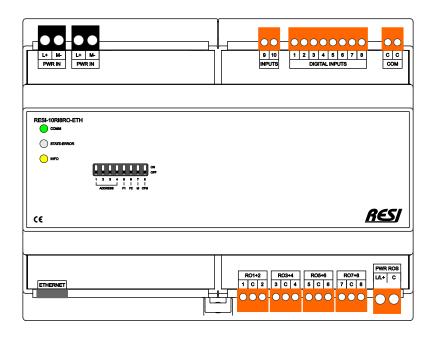

DIN EN 50022 Snap-on for DIN-Rail

ON-WALL Mounting on-wall

ETHERNET

XT8

12-48V= Power supply

8xFormA common power



10	LOGIC INPUT	12250V~=
Digital Inputs	All inputs use same power supply	≤1.8mA
8 Relay Outputs	RELAY OUTPUT Form A relays with common supply+root	≤30V= ≤250V~ ≤6A AgSnO ₂

IO module with 10 digital inputs for 12-250Vac/dc signals and 8 relay outputs for switching AC or DC signals.

All inputs use same common contact for a common AC or DC power supply.

All inputs are galvanic-ally insulated from the rest of the module.

All 8 relay outputs have a common power supply terminal.

