


# RESI-20RI16RO-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface. The IO module offers 20 digital inputs for AC or DC signals 12-250V $\sim$ = and 16 Form A relay outputs for AC/DC signals with common power supply+root contacts.

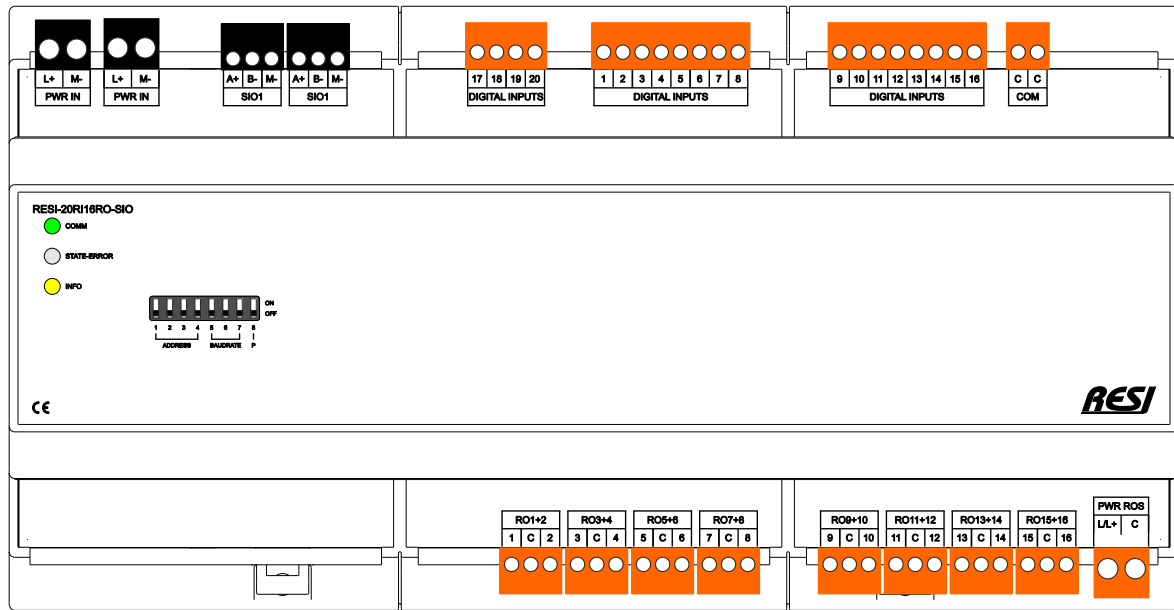

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	RS485	XT12 213x110x62mm	12-48V= Power supply	16xFormA common power	
-----------------------------------------	-----------------------------	-------	----------------------	-------------------------	--------------------------	--

20 Digital Inputs	LOGIC INPUT All inputs use same power supply	12...250V $\sim$ = $\leq$ 1.8mA
16 Relay Outputs	RELAY OUTPUT Form A relays with common supply+root	$\leq$ 30V= $\leq$ 250V $\sim$ $\leq$ 6A AgSnO <sub>2</sub>

#### Functionality

IO module with 20 digital inputs for 12-250Vac/dc signals and 16 relay outputs for switching AC or DC signals. All inputs use same common contact for a common AC or DC power supply. All inputs are galvanic-ally insulated from the rest of the module. All 16 relay outputs have a common power supply terminal.