


RESI-32DI24RO-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface.
The IO module offers 32 digital inputs for DC signals 12-48V= and 24 Form A relay outputs for AC/DC signals.

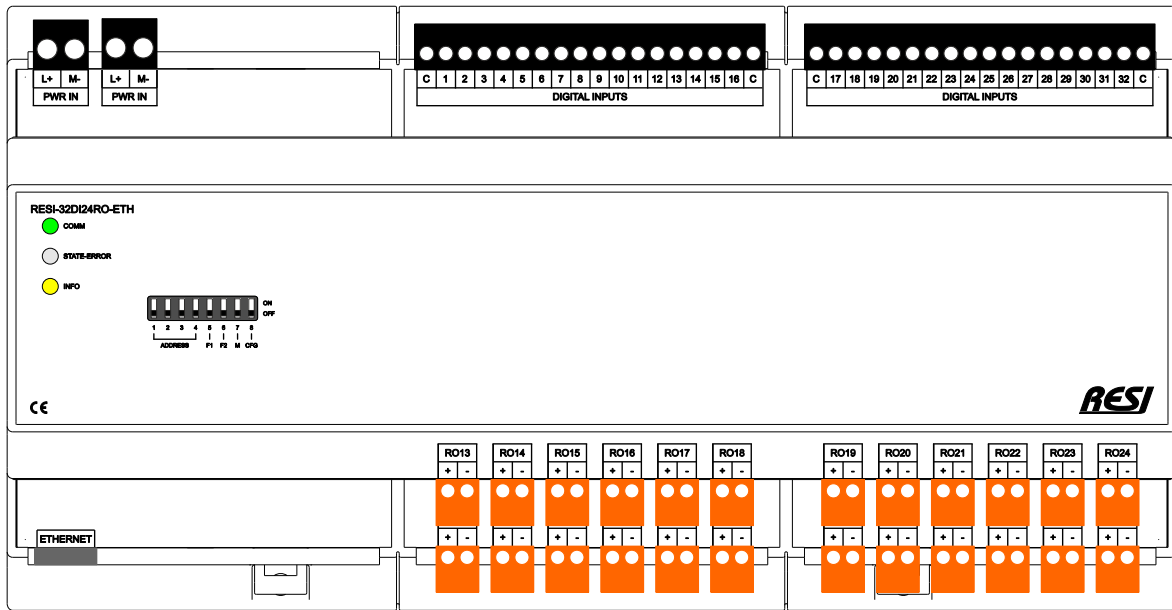

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT12 213x110x62mm	12-48V= Power supply	24xFormA	
---	-----------------------------	----------	----------------------	-------------------------	----------	--

32 Digital Inputs	LOGIC INPUT	12...48V= ≤1.8mA
24 Relay Outputs	RELAY OUTPUT Form A relays	≤30V= ≤250V~ ≤6A AgSnO ₂

Functionality

IO module with 32 digital inputs for 12-48Vdc signals.
and 24 relay outputs for switching AC or DC signals.
All inputs use same common contact for a common DC power supply.
All relay outputs are separated with its own root contact.