


RESI-4SB-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 8 Form A relay outputs for AC/DC signals with common power supply+root contacts for time driven control of up to 4 shades or blinds.

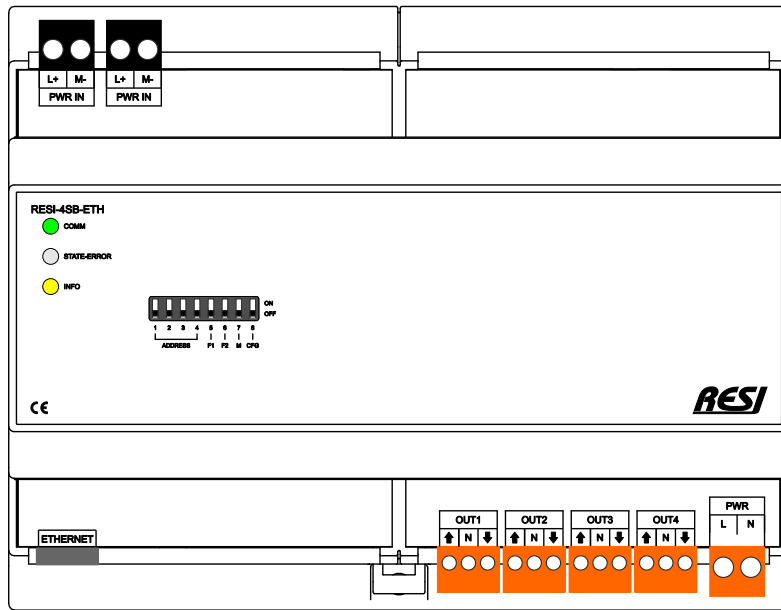

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT8 143x110x62mm	12-48V= Power supply	8xFormA shades & blind control	
---	-----------------------------	----------	---------------------	-------------------------	--------------------------------------	--

8 Relay Outputs	RELAY OUTPUT Form A relays with common supply+root	≤30V= ≤250V~ ≤6A AgSnO ₂
-----------------------	--	--

Functionality
IO module with 8 relay outputs for time driven control of 4 shades or blinds with AC or DC engines. All 8 relay outputs have a common power supply terminal.