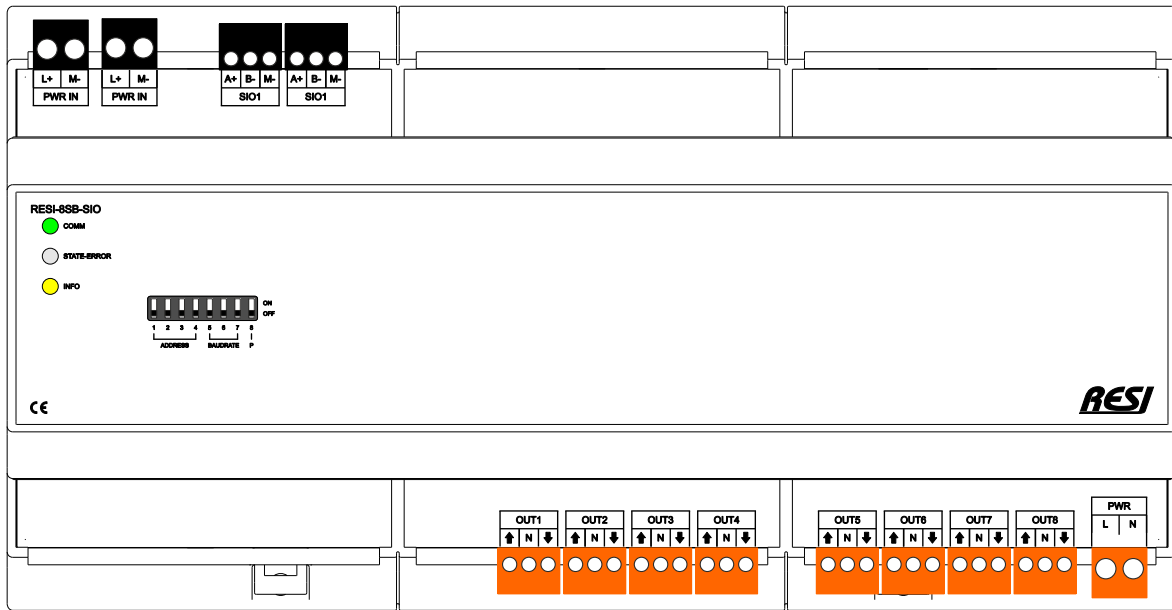# RESI-8SB-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface.
The IO module offers 16 Form A relay outputs for AC/DC signals with common power supply+root contacts
for time driven control of up to 8 shades or blinds.



| DIN EN 50022 | ON-WALL | RS485 | XT12 | 12-48V= | 16xFormA | |
| --- | --- | --- | --- | --- | --- | --- |
| Snap-on for DIN-Rail | Mounting on-wall | | 213x110x62mm | Power supply | shades & blind control | |

| 16 Relay Outputs | RELAY OUTPUT | ≤30V= |
| --- | --- | --- |
| | Form A relays with common supply+root | ≤250V~ ≤6A AgSnO$_2$ |

### Functionality
IO module with 16 relay outputs for time driven control of
8 shades or blinds with AC or DC engines.
All 16 relay outputs have a common power supply terminal.

RESI