


# RESI-8SB-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 16 Form A relay outputs for AC/DC signals with common power supply+root contacts for time driven control of up to 8 shades or blinds.

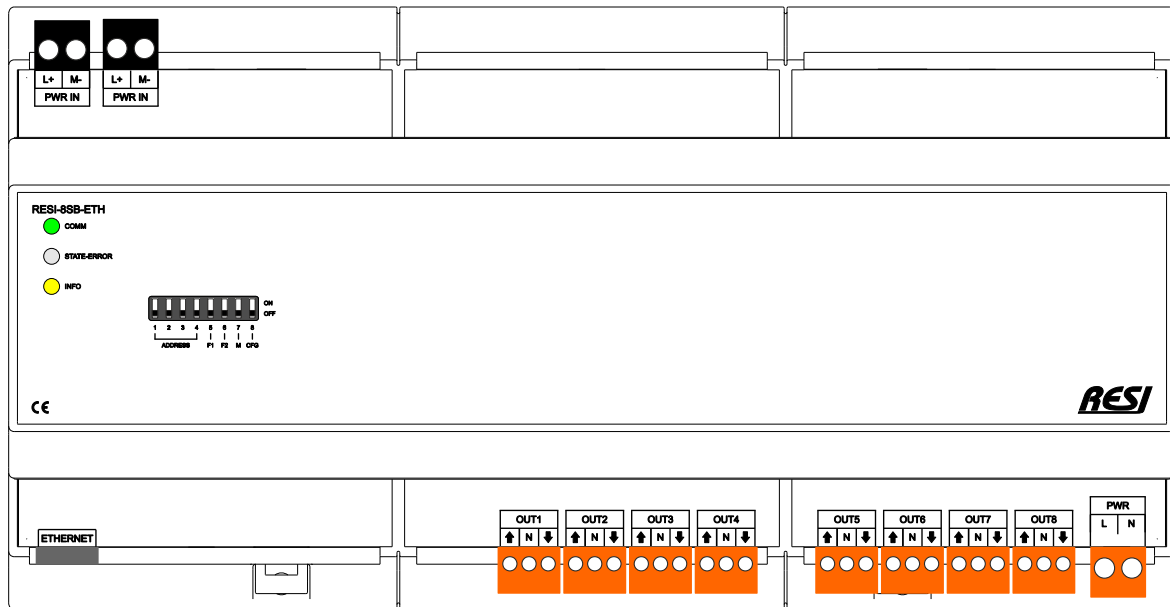

|   |                             |          |                      |                         |                                       |  |
|---|-----------------------------|----------|----------------------|-------------------------|---------------------------------------|--|
| DIN EN 50022<br>Snap-on<br>for DIN-Rail | ON-WALL<br>Mounting on-wall | ETHERNET | XT12<br>213x110x62mm | 12-48V=<br>Power supply | 16xFormA<br>shades & blind<br>control |  |
|---|-----------------------------|----------|----------------------|-------------------------|---------------------------------------|--|

|                        |  |  |
|------------------------|--|--|
| 16<br>Relay<br>Outputs | RELAY OUTPUT<br>Form A relays<br>with common supply+root | ≤30V=<br>≤250V~<br>≤6A<br>AgSnO <sub>2</sub> |
|------------------------|--|--|

**Functionality**  
 IO module with 16 relay outputs for time driven control of 8 shades or blinds with AC or DC engines.  
 All 16 relay outputs have a common power supply terminal.