


# RESI-10RI4SB-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 10 digital inputs for AC or DC signals 12-250V $\sim$  and 8 Form A relay outputs for AC/DC signals with common power supply+root contacts for time driven control of up to 4 shades or blinds.

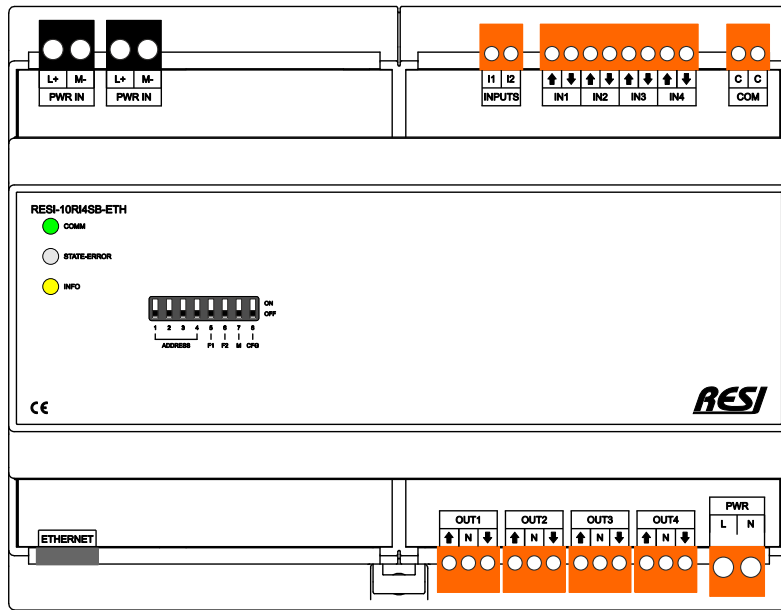

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT8 143x110x62mm	12-48V= Power supply	8xFormA shades & blind control	
---	-----------------------------	----------	---------------------	-------------------------	--------------------------------------	--

10 Digital Inputs	LOGIC INPUT All inputs use same power supply	12...250V $\sim$ = $\leq$ 1.8mA
8 Relay Outputs	RELAY OUTPUT Form A relays with common supply+root	$\leq$ 30V= $\leq$ 250V $\sim$ $\leq$ 6A AgSnO <sub>2</sub>

#### Functionality

IO module with 10 digital inputs for 12-250Vac/dc signals and 8 relay outputs for time driven control of 4 shades or blinds with AC or DC engines. All inputs use same common contact for a common AC or DC power supply. All inputs are galvanic-ally insulated from the rest of the module. All 8 relay outputs have a common power supply terminal.