


RESI-20RI8SB-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 20 digital inputs for AC or DC signals 12-250V \sim = and 16 Form A relay outputs for AC/DC signals with common power supply+root contacts for time driven control of up to 8 shades or blinds.

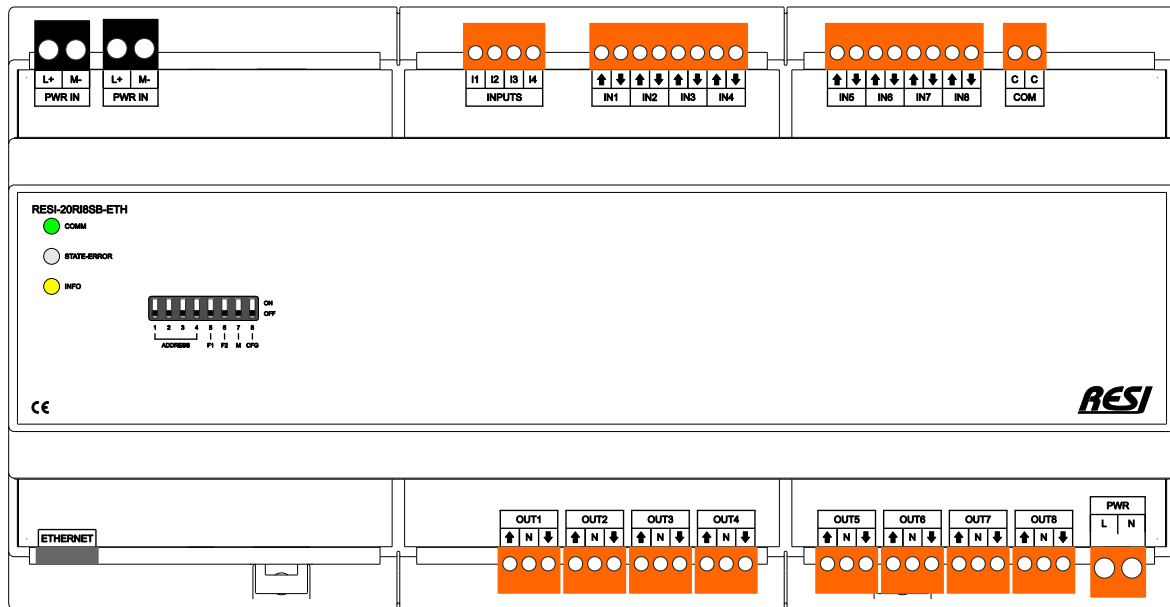

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT12 213x110x62mm	12-48V= Power supply	16xFormA shades & blind control	
---	-----------------------------	----------	----------------------	-------------------------	---------------------------------------	--

20 Digital Inputs	LOGIC INPUT All inputs use same power supply	12...250V \sim = \leq 1.8mA
16 Relay Outputs	RELAY OUTPUT Form A relays with common supply+root	\leq 30V= \leq 250V \sim \leq 6A AgSnO ₂

Functionality
 IO module with 20 digital inputs for 12-250Vac/dc signals and 16 relay outputs for time driven control of 8 shades or blinds with AC or DC engines. All inputs use same common contact for a common AC or DC power supply. All inputs are galvanic-ally insulated from the rest of the module. All 16 relay outputs have a common power supply terminal.