


RESI-6DI6DO8AIOX-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 6 digital inputs for DC signals 12-48V= and 6 digital outputs for DC signals $\leq 30V=$ and 8 universal inputs or outputs for analogue or digital signals or RTD sensors.

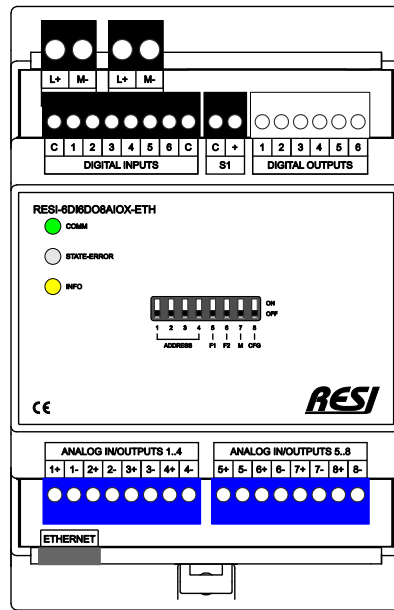

6 Digital Inputs	LOGIC INPUT	12...48V= $\leq 1.8mA$
6 Digital Outputs	DIGITAL OUTPUT Output is shortcut & over heat protected. Organized in 1 group with 6 outputs each. Each output group is externally supplied. Max. 1.8A power supply for output group.	$\leq 30V=$ $\leq 700mA$
8 Universal Channels Analog Input or Analog Output or RTD Inputs or Digital Input	ANALOG INPUT 0/2...10V or 0/4...20mA ANALOG OUTPUT 0/2...10V or 0/4...20mA RTD Sensor Input 0...80 Ω 80...200 Ω 200...10k Ω 10k Ω ...20k Ω 20k Ω ...100k Ω 100k Ω ...200k Ω 200k Ω ...1M Ω LOGIC INPUT or DRY CONTACT	$\pm 0.2\%$ 16 Bit $\pm 0.3\%$ 13 Bit 0.5% ± 0.5 0.3% 0.2% 0.3% 0.8% 1.0% 8.0% 16 Bit $\leq 40V \leq 1.8mA$ 0.5...24.5mA

XT4 72x110x62mm	12-48V= Power supply	
DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET

Functionality

IO module with 6 digital inputs for 12-48Vdc signals, 6 digital outputs for $\leq 30Vdc$ signals and 8 universal inputs or outputs. Each output group detects power supply, overheat or short cut error. All outputs are galvanic-ally insulated from the rest of the module. Each analog channel can be configured to one of the following input or output types: AI: 0/2-10V, 0/4-20mA or AO: 0/2-10V, 0/4-20mA or RTD: 0-1M Ω or DI: max 30Vdc Signals or dry contact