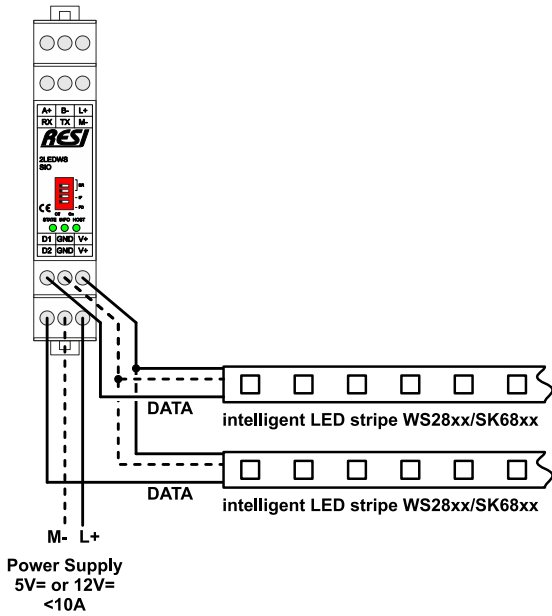# RESI-2LEDWS-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS232 or RS485 interface.
The IO module is a two channel module to control up to 512 WS28xx LEDs on each channel.

DIN EN 50022 Snap-on for DIN-Rail	RS232 RS485
CEM17 17.5x90x56.4mm	12-48V= Power supply

2 Channels 512 LEDs/channel	PROTOCOL OUTPUT for WS28xx LED Stripes	+5V or +12V LED supply

Functionality
IO module with 2 channels to control intelligent WS28xx LED stripes.
Each LED stripe can have up to 512 LEDs, which are individually controllable.
We support RGB and RGBW LED stripes.
External power supply for LED stripes with +5V or +12V necessary.

RESI