


# RESI-S4AIOX-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 4 universal inputs or outputs for analogue or digital signals or RTD sensors.

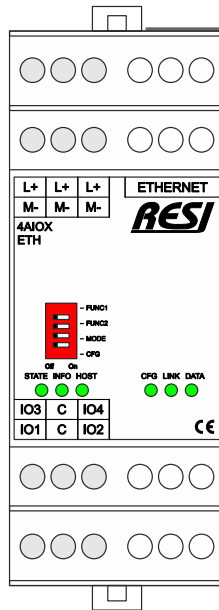

CEM35 35.8x90x56.4mm	DIN EN 50022 Snap-on for DIN-Rail	RS232 RS485	12-48V= Power supply
<p><b>4</b> Universal Channels</p> <p>Analog Input or Analog Output or RTD Inputs or Digital Input</p>	<p><b>ANALOG INPUT</b> 0/2...10V or 0/4...20mA</p> <p><b>ANALOG OUTPUT</b> 0/2...10V or 0/4...20mA</p> <p><b>RTD Sensor Input</b> 0...80Ω 80...200Ω 200...10kΩ 10kΩ...20kΩ 20kΩ...100kΩ 100kΩ...200kΩ 200kΩ...1MΩ</p> <p><b>LOGIC INPUT or DRY CONTACT</b></p>	<p><b>±0.2%</b> 16 Bit</p> <p><b>±0.3%</b> 13 Bit</p> <p>0.5%±0.5 0.3% 0.2% 0.3% 0.8% 1.0% 8.0% 16 Bit</p> <p><b>≤40V ≤1.8mA</b> <b>0.5...24.5mA</b></p>	
<p><b>Functionality</b> IO module with 4 universal inputs or outputs. Each channel can be configured to one of the following input or output types: AI: 0/2-10V, 0/4-20mA AO: 0/2-10V, 0/4-20mA RTD: 0-1MΩ DI: max 30Vdc Signals or dry contact</p>			