


RESI-12DO-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface. The IO module offers 12 digital outputs for DC signals $\leq 30V=$.

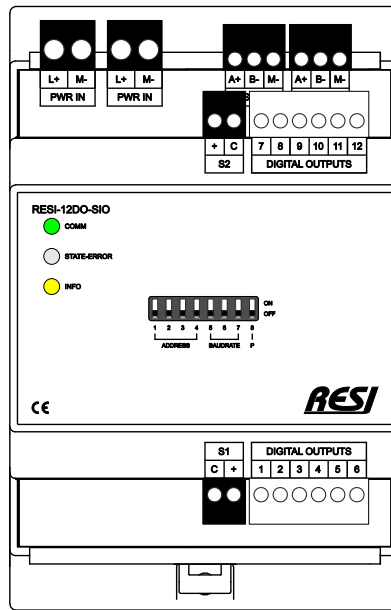

| | | | | |
|---|-----------------------------|-------|--------------------|-------------------------|
| DIN EN 50022 Snap-on for DIN-Rail | ON-WALL Mounting on-wall | RS485 | XT4 72x110x62mm | 12-48V= Power supply |
|---|-----------------------------|-------|--------------------|-------------------------|

| | | |
|-----------------------|---|-----------------------------|
| 12 Digital Outputs | DIGITAL OUTPUT Output is shortcut & over heat protected. Organized in 2 groups with 6 outputs each. Each output group is externally supplied. Max. 1.8A power supply for output group. | $\leq 30V=$ $\leq 700mA$ |
|-----------------------|---|-----------------------------|

Functionality
IO module with 12 digital outputs for $\leq 30Vdc$ signals.
Each group of 6 outputs has its own power supply connector.
Each output group detects power supply, overheat or short cut error.
All outputs are galvanic-ally insulated from the rest of the module.