


RESI-24DO-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface. The IO module offers 24 digital outputs for DC signals $\leq 30V_{=}$.

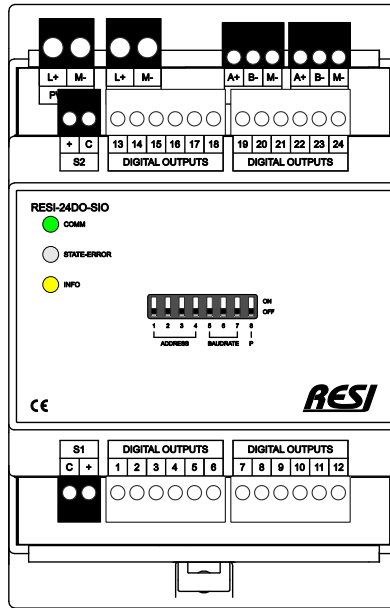

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	RS485	XT4 72x110x62mm	12-48V= Power supply
---	-----------------------------	-------	--------------------	-------------------------

24 Digital Outputs	DIGITAL OUTPUT Output is shortcut & over heat protected. Organized in 2 groups with 12 outputs each. Each output group is externally supplied. Max. 1.8A power supply for output group.	$\leq 30V_{=}$ $\leq 700mA$
-----------------------	--	--------------------------------

Functionality
IO module with 24 digital outputs for $\leq 30V_{dc}$ signals.
Each group of 12 outputs has its own power supply connector.
Each output group detects power supply, overheat or short cut error.
All outputs are galvanic-ally insulated from the rest of the module.