


RESI-C4-A-20SSR-xA-xGB

Our powerful controller for almost any IoT, Building Automation or Industrial Automation task. Based on the Raspberry Pi® Compute Module 4 with 2/4/8GB build in RAM, 32 GB SD CARD and stable 12-48Vdc power supply, 1xEthernet, 2xUSB 2.0, 1xMini-HDMI. LINUX is preinstalled. Additional versions with preinstalled CODESYS® runtime or Node Red, OpenHAB,... available. The controller offers 20 solid state relay outputs with Form A solid state relays.

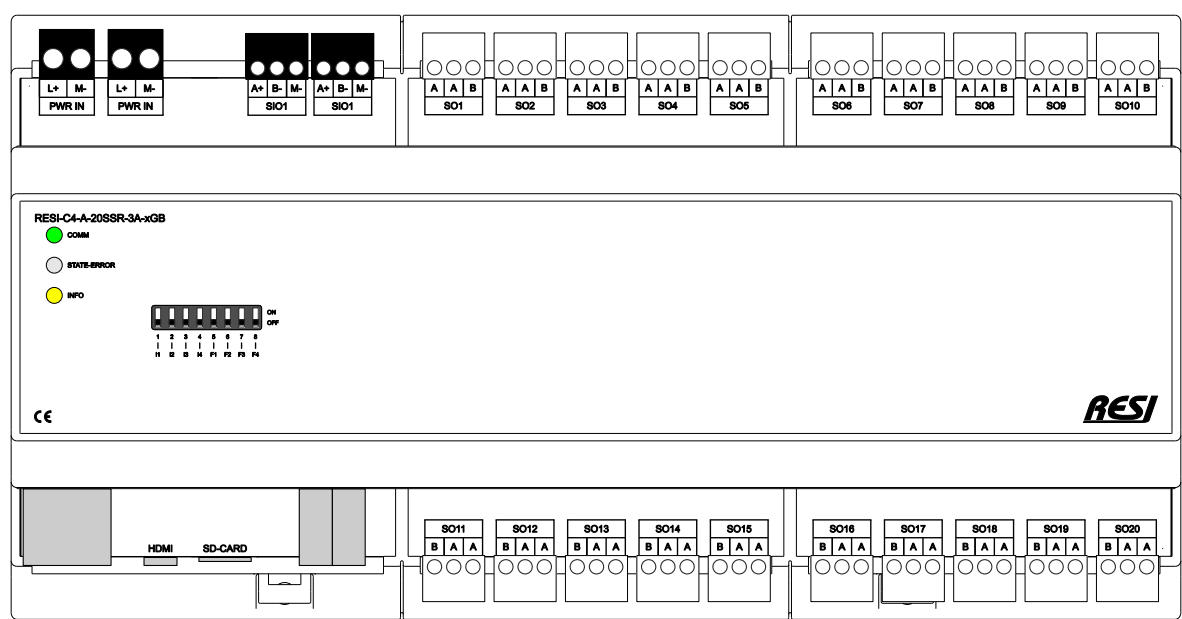

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	Raspberry Pi CM4® inside	XT12 213x110x62mm	12-48V= Power supply	20xFormA	
---	-----------------------------	--------------------------------	----------------------	-------------------------	----------	--

20 Solid State Outputs	SOLID STATE OUTPUT 20xForm A	≤230V~= ≤1A or ≤60V~= ≤3A or ≤60V~= ≤6A
------------------------------	---------------------------------	--

Functionality
IoT controller with 20 solid state outputs for switching AC or DC signals.
Three variants:
RESI-20SSR-1A-xxx: Solid state relays with ≤230V~=
RESI-20SSR-3A-xxx: Solid state relays with ≤60V~=
RESI-20SSR-6A-xxx: Solid state relays with ≤60V~=
≤6A