


# RESI-C4-A-4AIOX-xGB

Our powerful controller for almost any IoT, Building Automation or Industrial Automation task. Based on the Raspberry Pi® Compute Module 4 with 2/4/8GB build in RAM, 32 GB SD CARD and stable 12-48Vdc power supply, 1xEthernet, 2xUSB 2.0, 1xMini-HDMI. LINUX is preinstalled. Additional versions with preinstalled CODESYS® runtime or Node Red, OpenHAB,... available. The controller offers 4 universal inputs or outputs for analogue or digital signals or RTD sensors.

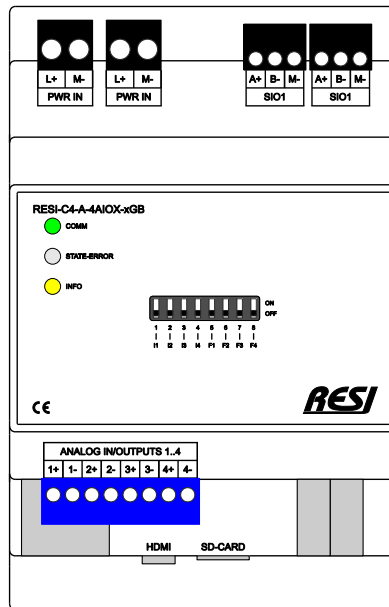

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	Raspberry Pi CM4® inside	XT4 72x110x62mm	12-48V= Power supply	8xAI/AO/RTD/DI 0-10V, 0-20mA RTD, DI
---	-----------------------------	--------------------------------	--------------------	-------------------------	--

4 Universal Channels  Analog Input or Analog Output or RTD Inputs or Digital Input	<b>ANALOG INPUT</b> 0/2...10V or 0/4..20mA	<b>±0.2%</b> 16 Bit
	<b>ANALOG OUTPUT</b> 0/2...10V or 0/4..20mA	<b>±0.3%</b> 13 Bit
	<b>RTD Sensor Input</b> 0...80Ω 80...200Ω 200...10kΩ 10kΩ...20kΩ 20kΩ...100kΩ 100kΩ...200kΩ 200kΩ...1MΩ	0.5%±0.5 0.3% 0.2% 0.3% 0.8% 1.0% 8.0% 16 Bit
	<b>LOGIC INPUT or DRY CONTACT</b>	<b>≤40V ≤1.8mA 0.5...24.5mA</b>

#### Functionality

IoT controller with 4 universal inputs or outputs.  
Each channel can be configured to one of the following input or output types:  
AI: 0/2-10V, 0/4-20mA or AO: 0/2-10V, 0/4-20mA or RTD: 0-1MΩ or  
DI: max 30Vdc Signals or dry contact