
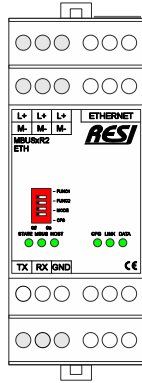


RESI-MBUSxR2-xxx

Our powerful gateways between M-BUS smart meter and MODBUS/RTU or MODBUS/TCP host. Read-out of smart meter data with M-BUS protocol according to EN 1434 and EN 13757. Smart meter must offer a RS232 interface or a RS232-MBUS level converter is installed. Connect water, heat, cold, gas or electricity meters with wired M-BUS interface via cable.



RESI-MBUS2R2-SIO	RS232 RS485	MBUS via RS232	2 Meter	40 Registers	MODBUS/RTU Slave
RESI-MBUS8R2-SIO	RS232 RS485	MBUS via RS232	8 Meter	400 Registers	MODBUS/RTU Slave
RESI-MBUS24R2-SIO	RS232 RS485	MBUS via RS232	24 Meter	1000 Registers	MODBUS/RTU Slave
RESI-MBUS48R2-SIO	RS232 RS485	MBUS via RS232	48 Meter	1200 Registers	MODBUS/RTU Slave
RESI-MBUS64R2-SIO	RS232 RS485	MBUS via RS232	64 Meter	1200 Registers	MODBUS/RTU Slave
RESI-MBUS2R2-ETH	ETHERNET	MBUS via RS232	2 Meter	40 Registers	MODBUS/TCP Server
RESI-MBUS8R2-ETH	ETHERNET	MBUS via RS232	8 Meter	400 Registers	MODBUS/TCP Server
RESI-MBUS24R2-ETH	ETHERNET	MBUS via RS232	24 Meter	1000 Registers	MODBUS/TCP Server
RESI-MBUS48R2-ETH	ETHERNET	MBUS via RS232	48 Meter	1200 Registers	MODBUS/TCP Server
RESI-MBUS64R2-ETH	ETHERNET	MBUS via RS232	64 Meter	1200 Registers	MODBUS/TCP Server