


RESI-RG-ENO2-K

Our powerful master gateway between ENOCEAN sensors and KNX bus system. Host protocol is KNX protocol via KNX TP cable. Bidirectional communication with ENOCEAN devices. Integrated ENOCEAN Antenna.

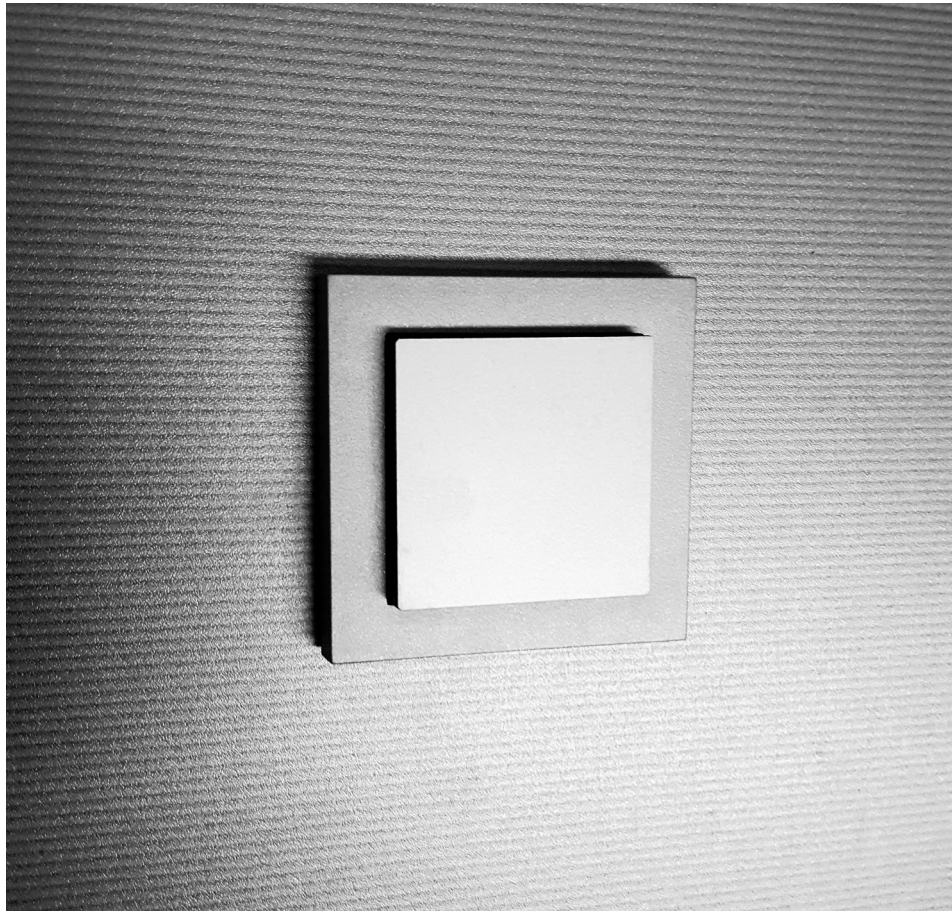

	ENOCEAN↔ KNX bidirectional gateway	ENOCEAN All frame types supported	KNX all common data types supported	868MHz EU Version
	Functionality Bidirectional gateway between KNX group addresses and ENOCEAN sensors with automatic data type conversion. Simple configuration of mapping between ENOCEAN sensors and KNX. Easy testing of mapping.	KNX Interface All 65536 KNX group addresses can be used Mapping is downloaded via KNX	DESIGN Various design options available	FRAMES GIRA®, BERKER®, JUNG®, SIEMENS®,...
	LIBRE OFFICE® free configuration software	On-wall mounting	SIZE 80x80x15mm	KNX Power supply