


RESI-8AIOX-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS232 or RS485 interface. The IO module offers 8 universal inputs or outputs for analogue or digital signals or RTD sensors.

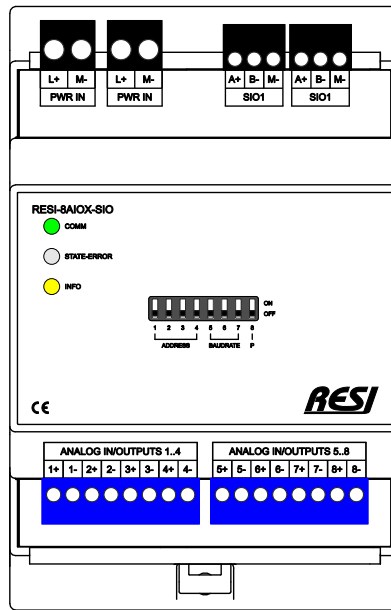

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT4 72x110x62mm	12-48V= Power supply	8xAI/AO/RTD/DI 0-10V, 0-20mA RTD, DI
---	-----------------------------	----------	--------------------	-------------------------	--

8 Universal Channels Analog Input or Analog Output or RTD Inputs or Digital Input	ANALOG INPUT 0/2...10V or 0/4..20mA	±0.2% 16 Bit
	ANALOG OUTPUT 0/2...10V or 0/4..20mA	±0.3% 13 Bit
	RTD Sensor Input 0...80Ω 80...200Ω 200...10kΩ 10kΩ...20kΩ 20kΩ...100kΩ 100kΩ...200kΩ 200kΩ...1MΩ	0.5%±0.5 0.3% 0.2% 0.3% 0.8% 1.0% 8.0% 16 Bit
	LOGIC INPUT or DRY CONTACT	≤40V ≤1.8mA 0.5...24.5mA

Functionality

IO module with 8 universal inputs or outputs.
Each channel can be configured to one of the following input or output types:
AI: 0/2-10V, 0/4-20mA or AO: 0/2-10V, 0/4-20mA or RTD: 0-1MΩ or
DI: max 30Vdc Signals or dry contact