


# RESI-12AIU-SIO

Our powerful IO module for a MODBUS/RTU or ASCII text protocol host with RS485 interface. The IO module offers 12 independent analog inputs for DC signals in the range of -10V...+10V.

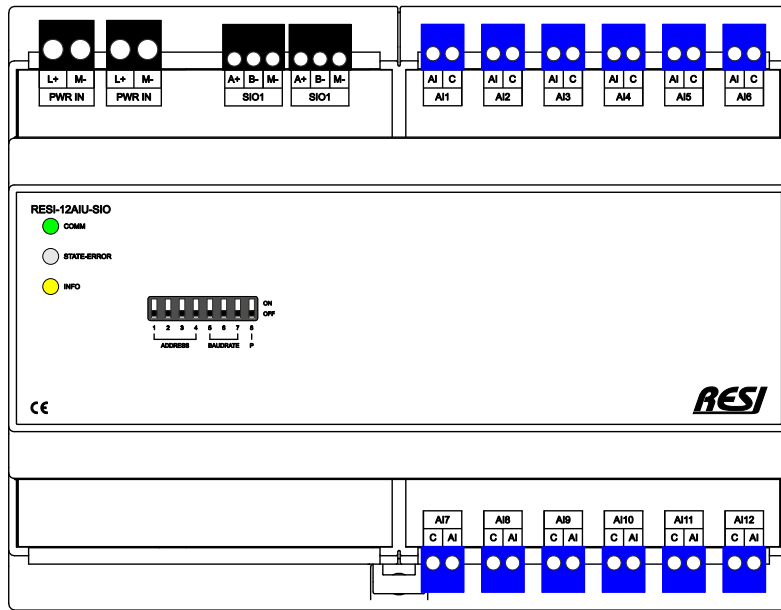

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	RS485	XT8 143x110x62mm	12-48V= Power supply	12xAI -10...+10V=
---	-----------------------------	-------	---------------------	-------------------------	----------------------

12 Analog Inputs	ANALOG INPUTS galvanic insulated	0...10V -10V...+10V  ±0.1% 16bit
---------------------	-------------------------------------	--

#### Functionality

IO module with 12 analogue inputs for DC signals. Input signal in the range of -10V and +10V.

Input group is galvanic-ally insulated from rest of module.