


RESI-12AIU-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 12 independent analog inputs for DC signals in the range of -10V...+10V.

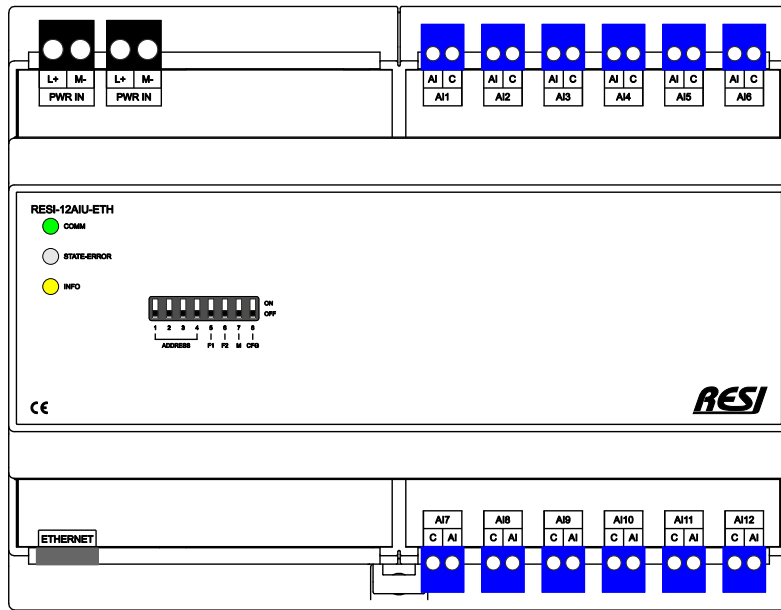

| | | | | | |
|---|-----------------------------|----------|---------------------|-------------------------|----------------------|
| DIN EN 50022 Snap-on for DIN-Rail | ON-WALL Mounting on-wall | ETHERNET | XT8 143x110x62mm | 12-48V= Power supply | 12xAI -10...+10V= |
|---|-----------------------------|----------|---------------------|-------------------------|----------------------|

| | | |
|---------------------|-------------------------------------|--|
| 12 Analog Inputs | ANALOG INPUTS galvanic insulated | 0...10V -10V...+10V ±0.1% 16bit |
|---------------------|-------------------------------------|--|

Functionality

IO module with 12 analogue inputs for DC signals. Input signal in the range of -10V and +10V.

Input group is galvanic-ally insulated from rest of module.