


RESI-12AOU-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers 12 independent analog outputs for DC signals in the range of -10V...+10V.

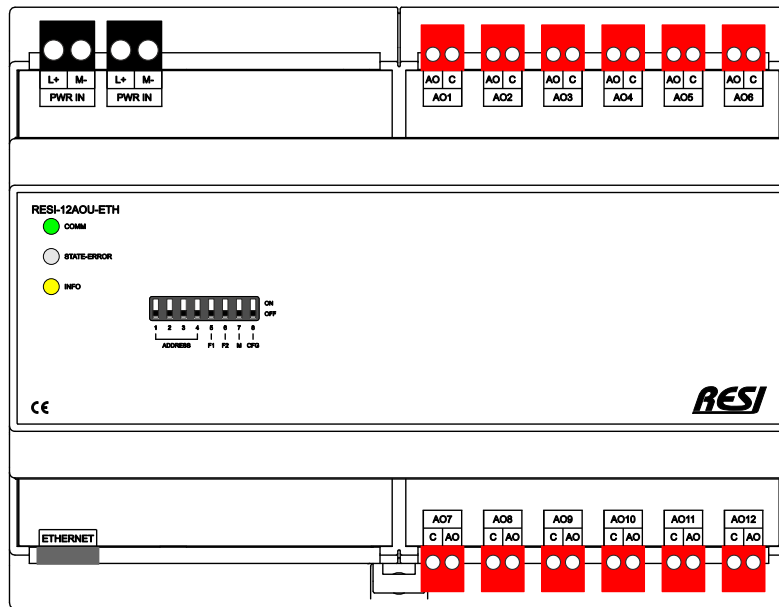

DIN EN 50022 Snap-on for DIN-Rail	ON-WALL Mounting on-wall	ETHERNET	XT8 143x110x62mm	12-48V= Power supply	12xAO -10...+10V=
---	-----------------------------	----------	---------------------	-------------------------	----------------------

12 Analog Outputs	ANALOG OUTPUTS galvanic insulated	0...10V -10V...+10V ±0.1% 12bit
----------------------	--------------------------------------	--

Functionality

IO module with 12 analogue outputs for DC signals. Output signal in the range of -10V and +10V.

Output group is galvanic-ally insulated from rest of module.