


RESI-4AIU-ETH

Our powerful IO module for a MODBUS/TCP or ASCII text socket protocol host with Ethernet interface. The IO module offers four independent analog inputs for DC signals in the range of -10V....+10V.

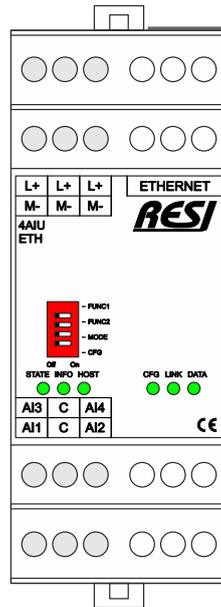

| | |
|---|-------------------------|
| DIN EN 50022 Snap-on for DIN-Rail | ETHERNET |
| CEM35 35.8x90x56.4mm | 12-48V= Power supply |

| | | |
|--------------------|-------------------------------------|--|
| 4 Analog Inputs | ANALOG INPUTS galvanic insulated | 0...10V -10V...+10V ±0.1% 16bit |
|--------------------|-------------------------------------|--|

Functionality
IO module with 4 analogue inputs for DC signals. Input signal in the range of -10V and +10V.
Input group is galvanic-ally insulated from rest of module.